

Applicant	:	Anhui Bosini Home Furnishing Co., Ltd.
Contact	:	MR FANG
Address	:	No. 1, Gechang Road, Economic Development Zone, Langxi County, Xuancheng City, Anhui Province
Sample description	:	Bench,Diningchair,Dining table,Accent chair
Style no.	:	--
PO no.	:	--
Manufacturer	:	--
Buyer name	:	--
Country of origin	:	--
Country of destination	:	--
Previous Report no	:	--
Overall rating	:	**PASS**
Sample received date	:	July 23, 2026
Test Period	:	July 23, 2026 To August 11, 2026

Photo of Submitted Sample

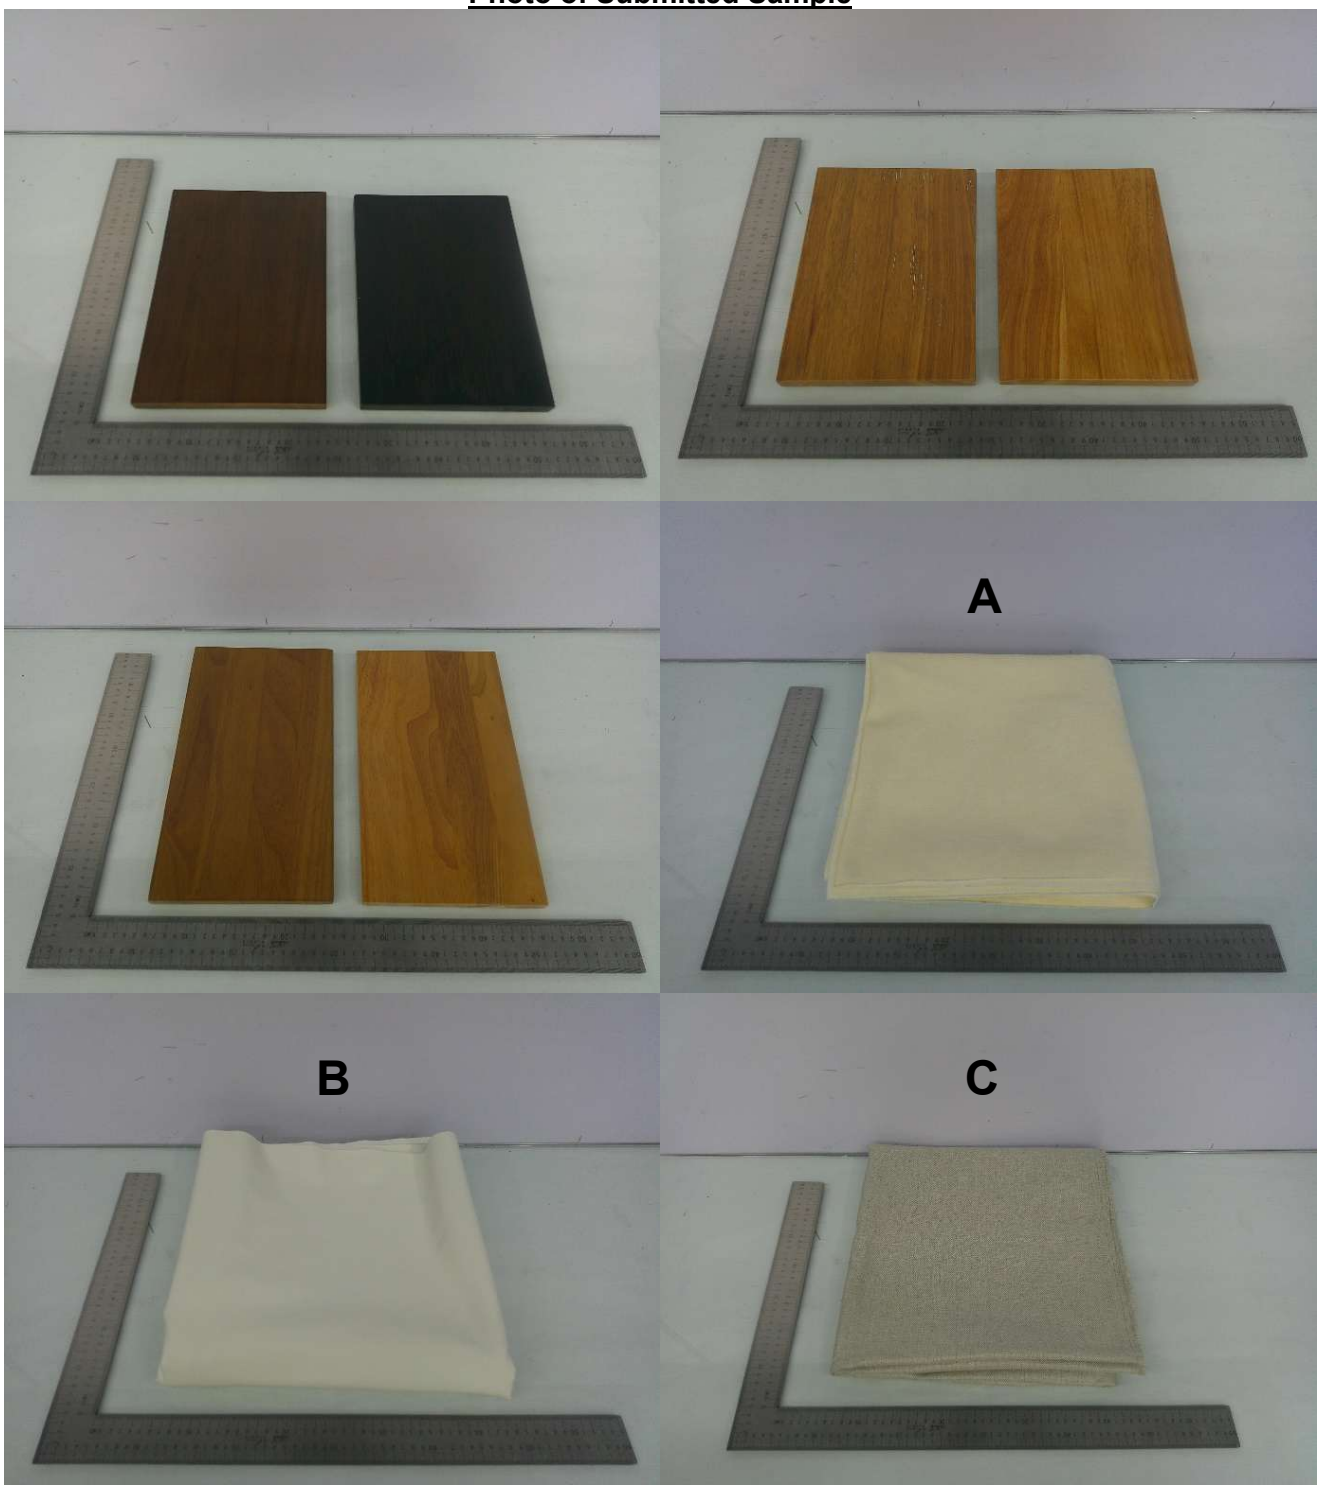

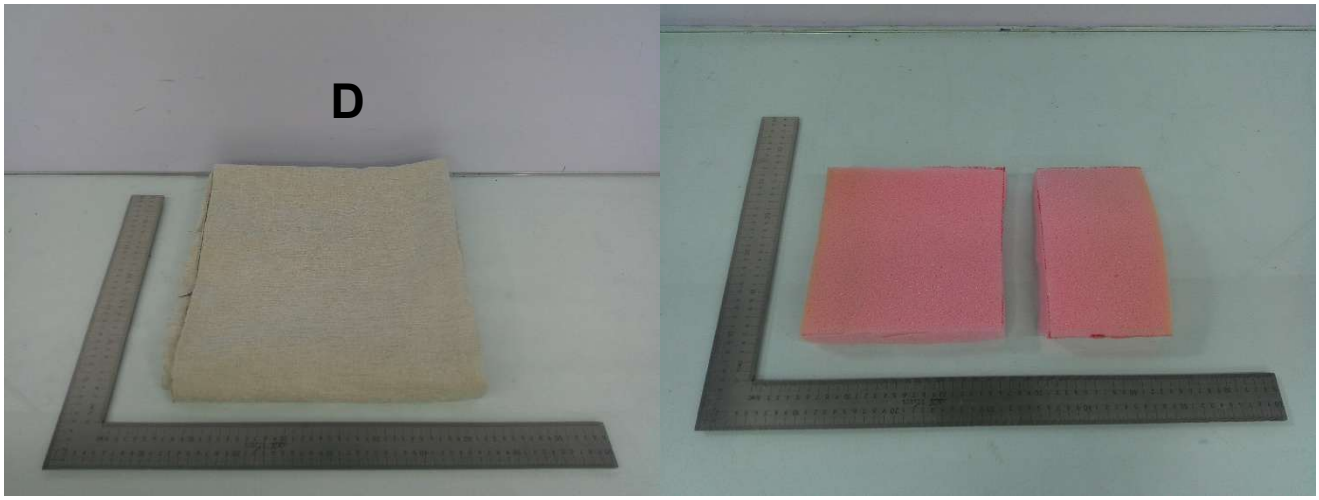

For and on behalf of
Eurofins MTS Consumer Product Testing (Dongguan) Co., Ltd.

Li Xin Yu, Insoul
Senior Technical Manager, Hardlines

The following test item(s) was/were performed on submitted sample(s) and/or component(s) confirmed by applicant

TEST RESULT SUMMARY	
Test Requested	**Results**
Total Lead Content in Paint or Similar Surface Coating – U.S. CPSC 16 CFR 1303	PASS
Flammability Test: Smolder Resistance of Materials California Bureau of Household Goods and Services Technical Bulletin 117-2013 (Section 1 Cover Fabric)	PASS
Flammability Test: Smolder Resistance of Materials California Bureau of Household Goods and Services Technical Bulletin 117-2013 (Section 3 Resilient Filling Material)	PASS

The above sample(s) and sample information was/were submitted and identified on behalf of the applicant. Eurofins will not be liable for the authenticity of the information. This test report is valid for the tested sample only. Without permission of the test center this test report is not permitted to be duplicated in extracts. Unless otherwise required by the applicant or method/regulation, decision rule in this report did not consider the measurement uncertainty.

COMPONENT BREAKDOWN LIST:

Test Item	Component Description
1	Black coating (On plate)
2	Dark brown coating (On plate)
3	Brown/white coating (On plate)
4	Light brown coating (On plate)
5	Beige/brown coating (On plate)
6	Light brown/dark brown coating (On plate)

TEST RESULT:

1. Total Lead Content in Paint or Similar Surface Coating – U.S. CPSC 16 CFR 1303

Test Item	Total Lead (Pb) (mg/kg)		Conclusion
	Result	Limit	
1+2+3	<10	90	PASS
4+5+6	<10	90	PASS

ND = Not Detected (Laboratory Reporting Limit = 10mg/kg)

Method: The test is conducted according to the US CPSC Standard Operating Procedure for Determining Lead (Pb) in Paint and Other Similar Surface Coatings, February 25, 2011 (CPSC-CH-E1003-09.1)

Note: mg/kg = milligram per kilogram

2. Flammability Test: Smolder Resistance of Materials California Bureau of Household Goods and Services Technical Bulletin 117-2013 (Section 1 Cover Fabric)

Sample Description:	Fabric A

Testing Condition: Temperature 24 (℃); Relative Humidity (R.H.) 60 (%)

Specimen	Continue to smolder after the 45 minute test duration (Yes/No)	A vertical char length (mm)	Transitions to open flaming (Yes/No)	Comment (Pass/Fail)
1	No	20	No	Pass
2	No	22	No	Pass
3	No	22	No	Pass

Remark: **Yes**= Smolder / Open Flame Occur **No**= No smolder / Not Open Flame Occur

Overall Rating (Pass/Fail)	PASS

Pass/Fail criteria:

1) A single mock-up test specimen fails to meet the requirements of this test procedure if any of the following criteria occurs:
   a) The mock-up test specimen continues to smolder after the 45 minute test duration
   b) A vertical char length (measured as specified in step 11.9 of ASTM E1353-08aε1) of more than 1.8 inches (45mm) develops on the cover fabric.
   c) The mock-up test specimen transitions to open flaming.
2) The cover fabric passes the test if three initial mock-up specimens pass the test, i.e., the cigarettes burn their full length and mock-ups are no longer smoldering.
3) If more than one initial specimen fails, the cover fabric fails the test.
4) If any one of the three initial specimens fails, repeat the test on additional three specimens.
5) If all three additional specimens pass the test, the cover fabric passes the test. If any one of the additional three specimens fails, the cover fabric fails the test.

Sample Description:	Fabric B

Testing Condition: Temperature 24 (℃); Relative Humidity (R.H.) 60 (%)

Specimen	Continue to smolder after the 45 minute test duration (Yes/No)	A vertical char length (mm)	Transitions to open flaming (Yes/No)	Comment (Pass/Fail)
1	No	21	No	Pass
2	No	22	No	Pass
3	No	22	No	Pass

Remark: **Yes**= Smolder / Open Flame Occur **No**= No smolder / Not Open Flame Occur

Overall Rating (Pass/Fail)	PASS

Pass/Fail criteria:

1) A single mock-up test specimen fails to meet the requirements of this test procedure if any of the following criteria occurs:
   a) The mock-up test specimen continues to smolder after the 45 minute test duration
   b) A vertical char length (measured as specified in step 11.9 of ASTM E1353-08aε1) of more than 1.8 inches (45mm) develops on the cover fabric.
   c) The mock-up test specimen transitions to open flaming.
2) The cover fabric passes the test if three initial mock-up specimens pass the test, i.e., the cigarettes burn their full length and mock-ups are no longer smoldering.
3) If more than one initial specimen fails, the cover fabric fails the test.
4) If any one of the three initial specimens fails, repeat the test on additional three specimens.
5) If all three additional specimens pass the test, the cover fabric passes the test. If any one of the additional three specimens fails, the cover fabric fails the test.

Sample Description:	Fabric C

Testing Condition: Temperature 24 (℃); Relative Humidity (R.H.) 60 (%)

Specimen	Continue to smolder after the 45 minute test duration (Yes/No)	A vertical char length (mm)	Transitions to open flaming (Yes/No)	Comment (Pass/Fail)
1	No	20	No	Pass
2	No	21	No	Pass
3	No	21	No	Pass

Remark: **Yes**= Smolder / Open Flame Occur **No**= No smolder / Not Open Flame Occur

Overall Rating (Pass/Fail)	PASS

Pass/Fail criteria:

1) A single mock-up test specimen fails to meet the requirements of this test procedure if any of the following criteria occurs:
   a) The mock-up test specimen continues to smolder after the 45 minute test duration
   b) A vertical char length (measured as specified in step 11.9 of ASTM E1353-08aε1) of more than 1.8 inches (45mm) develops on the cover fabric.
   c) The mock-up test specimen transitions to open flaming.
2) The cover fabric passes the test if three initial mock-up specimens pass the test, i.e., the cigarettes burn their full length and mock-ups are no longer smoldering.
3) If more than one initial specimen fails, the cover fabric fails the test.
4) If any one of the three initial specimens fails, repeat the test on additional three specimens.
5) If all three additional specimens pass the test, the cover fabric passes the test. If any one of the additional three specimens fails, the cover fabric fails the test.

Sample Description:	Fabric D

Testing Condition: Temperature 24 (℃); Relative Humidity (R.H.) 60 (%)

Specimen	Continue to smolder after the 45 minute test duration (Yes/No)	A vertical char length (mm)	Transitions to open flaming (Yes/No)	Comment (Pass/Fail)
1	No	20	No	Pass
2	No	21	No	Pass
3	No	21	No	Pass

Remark: **Yes**= Smolder / Open Flame Occur **No**= No smolder / Not Open Flame Occur

Overall Rating (Pass/Fail)	PASS

Pass/Fail criteria:

1) A single mock-up test specimen fails to meet the requirements of this test procedure if any of the following criteria occurs:
   a) The mock-up test specimen continues to smolder after the 45 minute test duration
   b) A vertical char length (measured as specified in step 11.9 of ASTM E1353-08aε1) of more than 1.8 inches (45mm) develops on the cover fabric.
   c) The mock-up test specimen transitions to open flaming.
2) The cover fabric passes the test if three initial mock-up specimens pass the test, i.e., the cigarettes burn their full length and mock-ups are no longer smoldering.
3) If more than one initial specimen fails, the cover fabric fails the test.
4) If any one of the three initial specimens fails, repeat the test on additional three specimens.
5) If all three additional specimens pass the test, the cover fabric passes the test. If any one of the additional three specimens fails, the cover fabric fails the test.

3. Flammability Test: Smolder Resistance of Materials California Bureau of Household Goods and Services Technical Bulletin 117-2013 (Section 3 Resilient Filling Material)

Sample Description:	Foam

Testing Condition: Temperature 24 (℃); Relative Humidity (R.H.) 60 (%)

Specimen	Continue to smolder after the 45 minute test duration (Yes/No)	A vertical char length (mm)	Transitions to open flaming (Yes/No)	Comment (Pass/Fail)
1	No	18	No	Pass
2	No	18	No	Pass
3	No	19	No	Pass

Remark: **Yes**= Smolder / Occur Open Flame **No**= Not smolder / Not Occur Open Flame

Overall Rating (Pass/Fail)	PASS

Pass/Fail criteria:

1) A single mock-up test specimen fails to meet the requirements of this test procedure if any of the following criteria occurs:
   a) The mock-up test specimen continues to smolder after the 45 minute test duration
   b) A vertical char length (measured as described in step 17.9 of ASTM E1353-08a ε1) of more than 1.5 inches (38 mm) develops on the cover fabric.
   c) The mock-up test specimen transitions to open flaming.
2) The resilient filling material passes the test if three mock-up specimens pass the test.
3) If more than one specimen fails, the resilient filling material fails the test.
4) If any one of the three initial specimens fails, repeat the test on additional three specimens.
5) If all three additional specimens pass the test, the resilient filling material passes the test. If any one of the additional three specimens fails, the resilient filling material fails the test.

****End of Test Report****

NOTE:

If there is question or concern regarding the above results, please contact the appropriate lab person below:

General question & concern: Vanna Qiu
Customer Service Coordinator
Vanna.Qiu@cpt.eurofinscn.com

"Technical & Quality" question & concern: dgInfo@cpt.eurofinscn.com

This test report is governed by the Terms and Conditions, available on request or attached to the end of this test report. Attention is especially drawn to the limitations of liability, indemnification and jurisdictional provisions defined therein. This report is issued strictly based on the testing of the samples submitted by you. The test results in this report refer only to the sample(s) actually tested and do not refer or be deemed to refer to any bulk production from which such sample(s) may be said to have been obtained. In the event that Eurofins MTS Consumer Product Testing (Dongguan) Co., Ltd. ("ERF") was requested to survey and test any bulk production quantity of samples, ERF, in the absence of any contrary written instructions, performed random sampling of bulk production for testing purposes. Variations in the conditions under which samples are stored, transported, etc., may lead to variations in the test results. ERF cannot anticipate and shall not be held responsible for variations in test results that may be due to factors beyond ERF's control, such as, sample cross-contamination, evaporation of volatile substances due to storage temperature, humidity, etc. This report does not constitute a recommendation, actual or implied, for any specific course of action. Other than the expressed warranties made in the Terms and Conditions of the ERF Test Request Form, ERF makes no warranties or representations either express or implied with respect to this report. In no circumstances whatsoever shall ERF be liable for any consequential, special or incidental damages arising out of, or in connection with this report.